

# Craig Wilson and Company

Patents, Trade Marks  
Industrial Designs  
Copyrights

## Patent & Trade Mark Agents

Craig Wilson, B. Eng. (Elect.)

### Consultant

Raymond A. Eckersley, B.A.Sc.(Elect. Eng.)

2570 Matheson Blvd. East  
Suite 211  
Mississauga, Ontario  
Canada L4W 4Z3

Tel: (905) 629-6940  
Fax: (905) 629-6943  
E-mail: wilpats@direct.com

March 23, 1999

INVENTOR: **CASPAR et al.**

REF NO.: **CWC-171**

TITLE: **"A WEB CUTTING APPARATUS FOR USE IN A  
PAPERMAKING MACHINE"**

Commissioner of Patents & Trademarks,  
Washington, D.C., 20231, U.S.A.

Sir:

I am enclosing herewith the following papers in connection with the application for patent identified above:


- Specification, Claims and Abstract of the Disclosure
- Declaration and Power of Attorney
- Copy each of: 4 sheets of drawing(s)
- Recordation Form Cover Sheet and Assignment
- Verified Statement Claiming Small Entity Status - Small Business Concern - (PTO/SB/10)
- Information Disclosure Statement and Form PTO-1449 including copies of art cited
- Certified Copy of Canadian Patent Application Serial No. 2,260,290 as filed January 25, 1999 upon which application for priority is based – **TO FOLLOW**

Enclosed are the required fees amounting to Five hundred and twenty-eight dollars (\$528.00) cheque no. 0242 of Craig Wilson and Company.

### These fees are calculated as follows:

Basic Fee	\$760.00
Total Claims $32 - 20 = 12 \times \$18.00$	<u>216.00</u>
Total of above calculations	\$976.00
Reduction by 50% for filing by small entity	<u>488.00</u>
Total of above calculations	\$488.00
Plus Assignment Fee	<u>40.00</u>
<b>TOTAL FEES REMITTED:</b>	<b>\$528.00</b>

Respectfully submitted,

  
Craig Wilson

CW:cjp  
Encl.



09/27/95 "03/24/99"

**VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS**  
**(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)

CWC-171

Applicant or Patentee. ROMAN C. CASPAR

Serial or Patent No : \_\_\_\_\_

Filed or Issued \_\_\_\_\_

Title A WEB CUTTING APPARATUS FOR USE IN A PAPERMAKING MACHINE

I hereby declare that I am

- ☒ the owner of the small business concern identified below:  
☐ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN PAPRIMA INDUSTRIESADDRESS OF SMALL BUSINESS CONCERN 45-A, boul. Saint-Joseph, Lachine, Quebec H8S 2K9 CANADA

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d) for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.  
☐ the application identified above  
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention must file separate verified statements averring to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization having any rights in the invention is listed below:

- ☐ no such person, concern or organization exists  
☒ each such person, concern or organization is listed below.

ROMAN C CASPAR  
 DIETER H HILKER

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that those statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING ROMAN C. CASPARTITLE OF PERSON IF OTHER THAN OWNER PRESIDENTADDRESS OF PERSON SIGNING 21 MARGARET ANN, BEACONSFIELD, QUEBEC H9W 5N7 CANADASIGNATURE DATE February 26/99

- 1 -

## A WEB CUTTING APPARATUS FOR USE IN A PAPERMAKING MACHINE

### Field of the Invention

The present invention relates to a web cutting apparatus for a papermaking machine and, in particular, to a water jet cutter that traverses along a beam pulling a water supply hose.

### 5 Background of the Invention

In the papermaking industry it is becoming more common to use water jet cutting apparatus to cut notches, tails and turn-up tips into the paper web to assist in the re-threading or turn-up of the web in the next section of the papermaking machine.

10 Water jet tail cutters typically have a beam that extends transversely above and across the width of the web of paper. The beam has a track extending therealong and a drive mechanism for moving a carriage along the track. The carriage has an arm for supporting a water jet nozzle. The nozzle is attached to one end of a pressurized water supply hose. The  
15 water supply hose is connected at its other end to a fitting in the beam and the hose rests along the beam. When the hose is pressurized, the water jet

nozzle directs a cutting jet or stream of water onto the web to cut through the web. The carriage and the nozzle move across the web to sever the web. As the carriage moves, it pulls or pushes the hose along the beam depending on the direction of movement of the carriage along the beam causing the hose to un-fold or fold in an overlapping position. In other known constructions, the hose is wrapped around a rotating drum. The drum is placed outside one end of the beam and requires a special rotatable water supply fitting connected at one end of the hose to allow the hose to rotate relative to the fitting so as not to twist the hose.

The water jet hoses are typically reinforced with flexible steel braid, and are carried in a relatively heavy "carrier" to protect, carry and guide the hose. When the hose is pressurized with water, it shrinks in length, becomes less flexible and increases in mass. While these characteristics of the pressurized hose have been resolved when the water jet carriage moves relatively slowly along the beam, the inertia associated with accelerating and decelerating the pressurized hose and carrier along the beam to high speeds increase the forces placed on the end connections of the hose and the structure of the hose carrier. Thus, this type of water jet cutting apparatus is not particularly suitable for higher cutting speed applications such as turn-up applications in high speed machines at the dry end of the machine where the speed of movement of the nozzle along the beam and across the web is critical to a successful turn-up of the web onto a new empty reel. Typically there are severe space limitations, in terms of beam length, in which to achieve high travelling speeds. In consequence, extremely high carriage accelerations and decelerations are needed in order to obtain the shortest travelling time within the available track

length.

In view of the forgoing, there is a need for an improved water jet cutting apparatus which is able to achieve extremely high acceleration, speeds, and deceleration suitable for use in the turn-up applications of paper making machinery where the speed at which the water jet moves across the web is not hindered by the inertia associated with pulling or pushing a water supply hose along the beam.

#### Summary of the Invention

The present invention relates to a web cutting apparatus for cutting a web in a paper making machine where the apparatus has a support beam that is mounted above or below the web and extends transversely across the width of the web. The beam supports a first moving carriage on which is mounted a cutting device, preferably a water jet cutting nozzle. As the first carriage moves along the beam, a water jet sprayed from the nozzle cuts the web. The improvement in the water jet cutting apparatus of the present invention resides in the manner in which the flexible hose is pulled and pushed along the beam by the water jet nozzle and first carriage as the water jet nozzle traverses across the beam. The movement of the hose of the present invention is assisted by a free spinning wheel mounted to a second, slower moving carriage movable along the beam. The hose is guided and stretched in a supported manner about the wheel as the second carriage moves across the beam. The speed of movement of the second carriage along the beam is chosen to be relative to the speed of movement of the first carriage along the beam. As a result, the spinning wheel acts as an intermediate movable support for the weight of the hose during

periods of acceleration and deceleration of the water jet nozzle depending on the direction the water jet nozzle is moving relative to the second carriage during the high speed cutting operation. The wheel, by supporting the hose during these periods, reduces the stresses placed on the hose connections to the nozzle and a beam mounted supply fitting.

5 The intermediate movable hose support of the wheel permits the first carriage carrying the water jet nozzle to move across the beam at considerably higher speeds than in the past.

The relative speed of movement of the first and second carriages in the preferred embodiment of the present invention is a ratio of 2:1. In otherwords, the second carriage moves at half the speeds of the first carriage. Alternatively, different speed ratios may be utilized depending on the width of the web to be cut, the speed at which the web is to be cut and the tension to be maintained on the supply conduit during movement

10 of the carriages.

15

While the preferred cutting device is a water jet cutting nozzle, it is envisaged that any form of cutter suitable for cutting into a web requiring a cutting power or medium supply could be employed. Accordingly, it is within the realm of the present invention that a laser cutting device could be used as an alternative to the water jet cutting nozzle. In this alternative embodiment, the water supply hose could be replaced by one or more hoses for supplying the cutting medium in the form of supply fluids or gasses and electrical power to the laser cutting device.

20

To effect movement of both the wheel and the water jet nozzle across the beam, the first and second carriages are mounted on a rail extending along the length of the support beam. Each carriage is driven

25

by a separate belt drive to which each carriage is fastened. Alternatively, in some applications a chain may be used. The belts are preferably located adjacent to each other in their longitudinal moving direction. The belts are joined and surround driving pulleys or sprockets located at  
5 opposing ends of the beam. In order to coordinate or control the movement of the first, faster moving carriage carrying the water jet nozzle relative to the second, slower moving carriage carrying the wheel, the belts are driven at relative speeds where the second slower carriage preferably moves at  $\frac{1}{2}$  the speed, at any instant in time or position along  
10 the beam, than the speed at which the first faster moving carriage moves across the beam. As a result, the water jet nozzle and first carriage move twice the distance across the beam than the wheel supporting the hose and the second carriage.

The coordination of the movement of the drive belts requires first  
15 and second drive means for driving the first and second carriages where the drive means are interdependent of each other. The synchronization of the speed of movement of the drive belts may be accomplished either by having two separate electric motors drive the belts at different speeds, or preferably, by a transmission mechanism combining the pulleys where the  
20 circumference of the pulley driving the second, slower moving, carriage is half that of the pulley that drives the belt that moves the first, faster moving, carriage.

While the application of the water jet cutting apparatus of the present invention may be used in most tail cutting, sheet breaker, or web  
25 cutting applications in a papermaking machine, the preferred application of the present invention is for the use as a high pressure water jet cutting

apparatus that moves at high speeds to cut a central tip in the web used for turn-up onto an empty reel or core in the reeling section of a paper making machine. In this application, the water jet cutting apparatus is constructed with a beam having two rails. The rails are located preferably in an upstream/downstream orientation relative to the direction of web travel. Alternatively, the rails could be positioned one above the other or spaced apart from each other on separate beams. The rails carry opposing first and second sets of carriages that each include a first, faster moving, carriage and a second, slower moving, carriage. The sets of carriages are located on opposing sides of the beam at opposite ends of the beam. The first faster moving carriages are attached to the same faster moving drive belt and the second slower moving carriages are attached to the same slower moving drive belt. In this application, the water jets are accelerated from opposite ends of the beam on different sides of the beam in direction towards each other in transverse direction of the web. Preferably, the water jets are initially positioned inboard of the edge of the web. As the water jets approach the mid point or center of the beam, the water jets cut through the web cutting into the moving web, thus forming a tip. The water jets continue to cut through and sever the web as the water jet nozzles in the first faster moving carriages traverse across the width of the beam to opposite sides of the beam. To control the start of the cut into the web, the water jets may either be turned on at a set time in the travel of the carriage, or preferably, the jets are started at the beginning of the carriage run outside of the web and a water jet catch tray is located beneath the beam during the first stage of travel of each first carriages to catch the jet spray. Alternatively, the web could be cut by either two water



jets moving towards each other from the outside edges of the web 12 or by a single water jet nozzle traversing the entire width of the web by itself.

To further assist the water jet cutting apparatus in cutting through the web, the beam of the water jet cutting apparatus has a flattened surface adjacent the web having a series of apertures through which negative pressure is drawn to pull the web up into engagement or contact with the flattened surface of the beam. This allows for the web to be held in place as the jets cut through the web. A channel is located in the beam immediately below the rail or track, or alternatively, a false bottom is positioned on the beam, to which a vacuum source located at the ends of the beam permit the negative pressure to hold the web through the series of apertures.

There are two alternative methods of holding the web against the force of the cutting jet that may be used with the water jet cutting apparatus of the present invention. One alternative is to cut the web over a roll surface such as the reel bar, or driving drum in a wind-up section of the paper making machine. The second alternative is to use a "table" with slots over which the web can be supported so that the table is located on the opposite side of the web from the water jet cutting apparatus.

In the preferred embodiment, the supply conduit is wrapped  $\frac{1}{2}$  a turn, or 180 degrees around the wheel. This has been found to be sufficient to maintain the desired guiding and stretching of the hose about the wheel as the second carriage moves along the beam with the first carriage. It is also envisaged that the supply conduit could be wrapped more than a half turn around the wheel to support the hose. The additional wrapping of the hose about the wheel may change the manner in which

the wheel supports the hose during periods of carriage acceleration and deceleration.

5 In accordance with one aspect of the present invention there is provided a web cutting apparatus for cutting a web in a papermaking machine. The apparatus comprises at least one beam extending transversely across the width of the web and a first carriage mounted to the beam and movable along the beam. A cutting apparatus is mounted to the first carriage for cutting into the web as the first carriage moves along the beam. A flexible supply conduit is connected to the cutting apparatus to supply the cutting apparatus with a medium to effect the cut into the web. The web cutting apparatus has first drive means for driving the carriage along the beam. A second carriage is mounted to the beam and moveable along the beam. A wheel is rotatably mounted on the second carriage for movement therewith along the beam. The wheel is adapted to have the supply conduit guided and stretched thereabout. The wheel reels the conduit as the second carriage moves along the beam. The web cutting apparatus has second drive means for driving the second carriage along the beam. The second drive means is interdependent with the first drive means to move the second carriage along the beam at speeds that are relative to the speeds at which the first drive means moves the first carriage along the beam.

#### Brief Description of The Drawings

For a better understanding of the nature and objects of the present invention reference may be had to the accompanying diagrammatic drawings in which:

Figure 1 is a perspective view showing the water placement of the

water jet cutting apparatus in a dry end of a paper making machine prior to turn up of the web onto a new reel

Figure 2 is a plan view showing the pattern of cut in the web made by the water jet apparatus of the preferred application of the present invention;

Figure 3 and 4 are side view showing the water jet cutting apparatus of the present invention in two different positions;

Figures 5 and 6 are top sectional views of the water jet cutting apparatus shown in different positions;

Figure 7 is a side view showing the faster moving carriages of the water jet cutting apparatus; and,

Figure 8 is a side view showing the slower moving carriages and wheels of the water jet cutting apparatus.

#### Detailed Description of The Drawings

Referring now to Figures 1 and 2 there is shown the water jet cutting apparatus 10 of the present invention for a web 12 in a papermaking machine 14. The water jet cutting apparatus 10 is shown in its preferred application at the reel of the papermaking machine 14 for cutting a turn-up tip that is fed onto a new winding spool 16. Prior to cutting the web 12, the web 12 is driven by driving drum reel 18 onto an existing winding spool 20.

The water jet cutting apparatus 10 has an elongated beam 15 which extends transversely across the width of the paper web 12. The beam 15 is supported above a top surface of the web 12 by side supports 17 for each of which only a portion is shown. Alternatively, the beam 15 may be positioned below the web 12 to cut up into the web 12. As the web 12

travels in the direction of arrow 22, beneath the water jet cutting apparatus 10, the water jet cutting apparatus 10 is operated to cut a pattern similar to that shown in the shaded area 24 of Figure 2.

5 The water jet nozzles 26 are located on opposite sides of the beam 15 in the direction 22 of paper travel. The water jet nozzles 26 make an initial cut into the paper at 28 forming tip 30. The pattern 28 is cut into the web as the web 12 moves in the direction of arrow 22 and the water jet nozzles 26 move to the outside edges of web 12 along the beam 15 to thereby sever the web 12. It should be understood that the cutting pattern 10 28 is a preferred cutting pattern and that the cuts into the web could be made from either two water jets moving towards each other from the outside edges of the web 12, or by a single water jet nozzle traversing the entire width of the web by itself.

Referring to Figures 3 to 6, the principle of operation of the water 15 jet cutting apparatus is shown. The components comprising the water jet cutting apparatus 10 are not shown to scale in these Figures. The water jet apparatus 10 includes a beam 15 mounted on support stands 17. The beam 15 extends across the width of web 12. The length of the beam 15 is typically anywhere from 15 to 35 feet.

20 The beam 15 has tracks or guide rails 31 mounted on opposite sides of the beam in the direction 22 of travel of the web 12. The apparatus 10 has first and second carriage sets 32, 34 (Figure 5) that are mounted on opposing sides of the beam to a corresponding one of the tracks 31 for movement therealong and along the beam.

25 Each of the first and second carriage sets 32, 34 has a first faster moving carriage 36 and a second slower moving carriage 38. The first

faster moving carriage 36 of each of the carriage sets 32, 34 has mounted thereto cutting apparatus 40 for supporting one of the nozzles 26 relative to the first or first faster moving carriage 36.

Each of the second slower moving carriages 38 has a hose wheel 42  
5 mounted to the carriage for free rotation about axis 44 as the carriage 38 moves along the track 31. A water supply conduit hose 46 extends from one end of the beam adjacent the track 31 and is guided and stretched 180 degrees about the wheel 42. Hose 46 is connected at one end to the cutting  
10 apparatus 40 mounted to the first faster moving carriage 36 and is connected at its other end to a clamp fitting 48 located in a bulkhead 49 of the beam 15. The hose is held at the bottom end in a clamp which is tensioned by a spring. This clamping of the hose 46 accommodates for hose shrinkage when the hose is pressurized. The clamp 48 holds and pre-  
15 tensions the hose 46 so that hose 46 is in contact with the wheel 42 at all times. Pressurized water is supplied along the flexible steel reinforced hose 46 to the water jet nozzle 26.

As seen in Figure 5, each of the first and second carriage sets 32 and 34 are moved in the direction of opposing arrows 33 and 35, respectively in precise displacement by means of first drive means 50 and  
20 second drive means 52. The first drive means 50 includes a first movable belt 54 that extends along the beam 15 and is looped at the ends of the beam 15 around first pulleys 56. The first carriages 36 of each of the sets 32 and 34 of carriages are mounted or secured to the belt 54. The rotation  
25 of the first belt 54 around pulleys 56 is driven by power synchronized electric motors 60. Alternatively only one motor may be used to drive one set of the pulleys.

The second drive means 52 includes a second belt 62 extending along the beam 15 and around pulleys 64 located at opposing ends of the beam 15. The second carriages 36 are secured to the belt 62 for movement therewith. The pulleys 64 are mounted through shaft 70 to the motors 60. The first drive means 50 moves the first faster moving carriages 36 at speeds twice as fast as the speeds at which the second drive means 52 moves the second or second slower moving carriages 38. This is accomplished by having the circumference of pulleys 64 chosen to be one half that of pulleys 56. As a result, as the first faster moving carriage 36 moves across the web 12, the second slower moving carriage 38 travels one half the distance to the center of the beam 15 as shown in Figure 4 and 6.

In Figure 3, the first carriage 36 and the second carriage 38 are shown positioned on the left of the beam 15. In this position, the hose 42 is wound around the wheel 42 and extends along the bottom of the beam 15 back towards the other end of the beam 15. In this position, very little weight of the hose is now carried by the connection to the water jet cutting apparatus 40. At this point, the water jets 26 are turned on and caught by the catch tray 72 (Figure 2). The first and second carriages are then accelerated to the right as shown in Figure 4. As the water jet nozzle 26 passes the end of the catch tray 72, the water jet cuts into the web passing beneath the water jet cutting apparatus 10.

In the position shown in Figure 4, the hose 46 is wrapped around the wheel 42 and passes back to the end fitting 74 shown in the right of Figure 4. When carriage 38 carrying wheel 42 decelerates to this position a substantial portion of the momentum of the hose 46 is taken up by the

wheel 42. This reduces the load placed on the connection to the cutting apparatus 40 found on the faster moving carriage 36.

Referring to Figure 7, there is shown a partial cross-section of the first carriage mounted for movement along the beam 15. It should be understood that in Figure 7, this is a mirror image of the water jet cutting  
5 nozzles 26 taken at the center of the beam as the nozzles 26 are passing each other and are initiating the cut through the web. Each of the carriages 36 has the cutting apparatus 40 mounted. The water jet nozzles 26 are supported by a support arm 82 relative to the carriage 36. The carriage 36 is mounted to grooved wheels 84. Wheels 84 are located on  
10 opposing sides of each of the rails 31. The carriage 36 has brackets 88 that sandwich the first belt 54 and secure the carriage 36 relative to the first belt 54. These brackets 88 have two functions. On one carriage 36 the brackets clamp the belt to the carriage. On the other carriage 36, two sets of brackets are located beside each other. One set of brackets is used  
15 to clamp one end the belt to the carriage. The other set of brackets cooperate with tightening fasteners (not shown) to tension the belt 62 and secure the tensioned belt to carriage 38. Thus, as the first belt 54 moves along the beam 15 the carriage 36 is moved with this belt. The carriage  
20 36 includes a recessed or cut out section 90 which permits for the second belt 62 to pass relative to the carriage without touching the carriage or pulling the first carriage 36. Bracket 88 is used to tension belt 54

Referring to Figure 8, a sectional view of the second carriage 38 is shown where the wheels 42, of the second carriage 38, are located in a  
25 center beam position shown in Figure 6. The carriage 38 is mounted at a shaft 44 to rotating wheel 42. Rotating wheel 42 has one groove 100

around which the hose 46 travels. The carriage 38 has rotatable grooved wheels 96 which are also mounted on opposing sides of a respective rail 31. The carriage 38 further includes two brackets 104 which sandwich or secure belt 62 relative to the carriage 38. These brackets 104 also have two functions. On one carriage 38 the brackets clamp the belt to the carriage. On the other carriage 38, two sets of brackets are located beside each other. One set of brackets is used to clamp one end of the belt to the carriage. The other set of brackets co-operate with tightening fasteners (not shown) to tension the belt 62 and secure the tensioned belt to carriage 38. In this fashion, as the belt 62 moves along, or relative to the rail or track 31, the carriage 38 rides the rail and is pulled along the rail 31. As shown, the carriage 38 is mounted on rail 31 to the belt 54 to pass freely relative thereto.

In the event additional control over the reliability assurance of operation of the water jet cutting apparatus was required, two hoses 42 along with 2 nozzles 26 could be run in parallel to the faster moving carriage 36 and connected through a suitable valve, or switching means to the water jet cutting nozzle 26. In this embodiment, the wheel 42 would have two grooves 100 around each of which separate water supply hoses 46 would be looped.

Referring to both Figures 7 and 8, the beam 15 is shown to comprise two U-shaped channel sections 120 each having an internal wall 122 with curved end walls 124. This may also be constructed of another type of structural member such as an "I" beam. The lower wall 124 has a series of apertures 126 and an overlapping enclosing wall 128 through which a vacuum is drawn to provide a negative air flow pressure along the



bottom surface 124 of the beam 15. This allows the web 12 to be drawn up against the bottom surface of the beam 15.

In Figure 3, both carriages 36 and 38 are parked at the left beside each other. When the carriages 36 and 38 are accelerated from this position to the right, the faster moving carriage 36 increases its distance from the slower moving carriage 38 and thereby begins to pull the hose 46 increasing the weight of the hose between the faster moving carriage 36 and the slower moving carriage 38. When the faster moving carriage 36 begins to decelerate, the inertia of the hose normally causes the hose to keep moving at a speed that would cause the hose to buckle or stress its connection with the carriage 36. However, in the present invention, the wheel 42 is placed exactly at the radius of where the hose is bending and thereby catches the weight of the hose 46. As braking is applied to the faster moving carriage 36, the inertia of the hose continually tries to move it forward, still at high speed, and the wheel 42 simply catches all the weight of the hose 46 putting virtually zero load on the neck of the hose 46 at the first carriage 36, until the carriages 36 and 38 come to a full stop. This is the preferred manner in which the carriages 36, 38 move to effect a cut into the web.

Alternatively, if the first and second carriages 36, 38 are in the parked position of Figure 4 , and are accelerated from the right to left in this drawing, then the faster moving carriage 36 has to push the weight of the hose 46 along the beam 15. As the carriages 36, 38 accelerate to the left the hose is a very thin cord and normally tends to buckle, but the wheel 42 is also accelerating and is always located at the natural center of the point at which the hose bends. As the second carriage moves to the left

and the wheel spins, the wheel carries the entire weight of the moving portion of the hose 46. The wheel 42 continues to carry that weight of the hose 46 until the point at which it begins to decelerate – optimally in the mid point of it's travel. At this point the weight of the hose 46 is no longer carried by the wheel because it is on the outside curb of the wheel. The inertia of the hose 46 during deceleration in this direction, is pulling principally on the neck of the hose on carriage 36. This is why this is not the preferred direction of maximum deceleration.

In any event, depending on the direction of movement of the first and second carriages 36, 38 to effect a cut into the web, the wheel 42 spins to allow for the hose 46 to move with faster moving carriage 36 while the slower moving carriage 38 supports the weight of the hose over at least a portion of the travel of the carriages along the beam. In so doing the hose wheel supports the weight of the hose 46 and maintains it in alignment with the first carriage 36 so that less strain and stress is placed on the ends of the hose.

It should be understood that alternative embodiments of the present invention may be readily apparent to a man skilled in the art in view of the above description for the preferred embodiments of this invention. Accordingly, the scope of the present invention should not be limited to the teachings of the preferred embodiments and should be limited to the scope of the claims that follow.

WHAT IS CLAIMED IS:

1. A water jet cutting apparatus for cutting a web in a papermaking machine, the apparatus comprising:

a beam extending transversely across the width of the web;

5 a first carriage mounted to the beam and movable along the beam;

a water jet cutting apparatus mounted to the first carriage and having a nozzle positioned for cutting into the web as the first carriage moves along the beam;

10 a flexible water supply conduit connected to said cutting apparatus to supply pressurized water to the water jet nozzle;

first drive means for driving the carriage along the beam;

a second carriage mounted to the beam and moveable along the beam;

15 a wheel rotatably mounted on the second carriage for movement therewith along the beam, the wheel adapted to have the water supply conduit guided and stretched thereabout, the wheel supporting the water conduit as the second carriage moves along the beam; and,

20 second drive means for driving the second carriage along the beam, the second drive means being interdependent with the first drive means to move the second carriage along the beam at speeds that are relative to the speeds at which the first drive means moves the first carriage along the beam.

25 2. The water jet cutting apparatus of claim 1 wherein the first drive means moves the first carriage across the width of the beam at twice the speeds at which the second drive means moves the second carriage along the beam.

00675105.03499

3. The water jet cutting apparatus of claim 1 wherein the beam includes a first track along which both the first and second carriages move.

5 4. The water jet cutting apparatus of claim 1 wherein: the first drive means includes a first movable belt extending around the beam, the first carriage being attached to the first movable belt;

a pair of first drive transmission pulleys mounted at the ends of the beam around which the first movable belt is driven;

10 the second drive means includes a second movable belt extending around the beam adjacent the first movable belt, the second carriage being attached to the second movable belt;

15 a pair of second drive transmission pulleys mounted at the ends of the beam around which the second movable belt is driven, and the second drive pulleys each having a circumference that is  $\frac{1}{2}$  the circumference of each of the first drive pulleys; and,

a drive motor mounted to at least one of the ends of the beam to drive a corresponding one of the first and second pulleys.

20 5. The water jet cutting apparatus of claim 4 wherein each of the first and second pulleys are toothed sprockets located at each end of the beam and are driven by a single drive shaft, and the first and second movable belts are timing belts

25 6. The water jet cutting apparatus of claim 4 wherein each of the first and second pulleys are toothed sprockets located at each end of the beam and are driven by a single drive shaft, and the first and second movable belts are chain belts.

7. The water jet cutting apparatus of claim 5 wherein the first

09275105 032499  
554260 5015260

and second sprockets located at each end of the beam are initially rotatable relative to each other for initial adjustments and are locked in place relative to each other during operation.

8. The water jet cutting apparatus of claim 1 wherein the water supply conduit has a first end connected to said cutting apparatus and has a second end connected to a water supply fitting located adjacent an end of the beam, the water supply fitting having a spring clamp to compensate for hose shrinkage while maintaining a nominal tension on the hose.

9. The water jet cutting apparatus of claim 1 wherein the beam has a wall adjacent the web that has apertures through which a negative pressure is drawn to pull the web against the wall of the beam.

10. A water jet cutting apparatus for cutting a turn-up tip in a web of a papermaking machine, the apparatus comprising:

a beam extending transversely across the width of the web;

15 first and second carriage sets mounted on opposing sides of the beam for movement along the beam in opposite transverse directions;

each of the first and second carriage sets having a faster moving carriage and a slower moving carriage;

20 a water jet cutting apparatus mounted to the faster moving carriage of each of the first and second carriage sets, the water jet cutting apparatus each having a water jet nozzle positioned for cutting into the web as the respective faster moving carriage moves along the beam;

flexible water supply conduits connected to the cutting apparatus to supply pressurized water to corresponding ones of the water jet nozzles;

25 hose carrying wheels mounted for rotation to each of the slower moving carriages for movement therewith along the beam, each of the

hose wheels having one of the water supply conduits guided and stretched, each of the hose wheels supporting the one water conduit as its slower moving carriage moves along the beam;

5 first drive means for driving the faster moving carriages along the beam in opposing transverse directions to each other; and,

second drive means for driving the slower moving carriages along the beam in opposing transverse directions to each other, the second drive means being interdependent with the first drive means to move the slower moving carriages along the beam at speeds that are relative to the speeds at which the first drive means moves the faster moving carriage along the beam.

10 11. The water jet cutting apparatus of claim 10 wherein the first drive means moves the faster moving carriage across the width of the beam at twice the speeds that the second drive means moves the slower moving carriage across the beam.

12. The water jet cutting apparatus of claim 10 wherein the beam includes a track on both sides of the beam along which respective sides the first and second carriage sets move.

13. The water jet cutting apparatus of claim 10 wherein:  
20 the first drive means includes a first movable ~~belt~~ extending around the beam, the faster moving carriage being attached to the first movable belt;

a pair of first transmission pulleys mounted at the ends of the beam around which the first movable belt is driven;

25 the second drive means includes a second movable belt extending around the beam adjacent the first movable belt, the slower moving

carriage being attached to the second movable belt;

a pair of second transmission pulleys mounted at the ends of the beam around which the second movable belt is driven, and the second drive pulleys each having a circumference that is  $\frac{1}{2}$  the circumference of each of the first drive pulleys; and,

a drive motor mounted to at least one of the ends of the beam to drive a corresponding one of the first and second pulleys.

14. The water jet cutting apparatus of claim 13 wherein each of the first and second pulleys are toothed sprockets located at each end of the beam are driven by a single drive shaft, and the first and second movable belts are timing belts.

15. The water jet cutting apparatus of claim 13 wherein each of the first and second pulleys are toothed sprockets located at each end of the beam are driven by a single drive shaft, and the first and second movable belts are chain belts.

16. The water jet cutting apparatus of claim 14 wherein the first and second sprockets located at each end of the beam which are initially rotatable relative to each other for initial adjustments and are locked in place relative to each other during operation.

17. The water jet cutting apparatus of claim 10 wherein the water supply conduit has a first end connected to said cutting apparatus and has a second end connected to a water supply fitting located adjacent an end of the beam, the water supply fitting having a spring clamp to compensate for hose shrinkage while maintaining a nominal tension on the hose.

18. The water jet cutting apparatus of claim 10 wherein the beam has a wall adjacent the web that has apertures through which a negative

pressure is drawn to pull the web against the wall of the beam.

19. The water jet cutting apparatus of claim 10 wherein a water jet catch tray is located at opposing sides and ends of the beam for preventing the water jet from contacting the web as the water jet moves  
5 with its respective faster moving carriage along the beam over the catch tray.

20. The water jet cutting apparatus of claim 10 wherein the hose wheel is a grooved wheel.

21. A web cutting apparatus for cutting a web in a papermaking  
10 machine, the apparatus comprising:

at least one beam extending transversely across the width of the web;

a first carriage mounted to the beam and movable along the beam;

a cutting apparatus mounted to the first carriage for cutting into the  
15 web as the first carriage moves along the beam;

a flexible conduit connected to said cutting apparatus to supply the cutting apparatus with a cutting medium;

first drive means for driving the carriage along the beam;

a second carriage mounted to the beam and moveable along the  
20 beam;

a wheel rotatably mounted on the second carriage for movement therewith along the beam, the wheel adapted to have the supply conduit guided and stretched thereabout, the wheel supporting the conduit as the second carriage moves along the beam; and,

25 second drive means for driving the second carriage along the beam, the second drive means being interdependent with the first drive means to



move the second carriage along the beam at speeds relative to the speeds at which the first drive means moves the first carriage along the beam.

22. The web cutting apparatus of claim 21 wherein the first drive means moves the first carriage across the width of the beam at twice the speed at which the second drive means moves the second carriage along the beam.

23. The web cutting apparatus of claim 21 wherein the beam includes a first track along which both the first and second carriages move.

24. The web cutting apparatus of claim 21 wherein:  
at least one beam is a single beam construction;  
the first drive means includes a first movable belt extending around the beam, the first carriage being attached to the first movable belt;  
a pair of first drive transmission pulleys mounted at the ends of the beam around which the first movable belt is driven;  
the second drive means includes a second movable belt extending around the beam adjacent the first movable belt, the second carriage being attached to the second movable belt;  
a pair of second drive transmission pulleys mounted at the ends of the beam around which the second movable belt is driven, and the second drive pulleys each having a circumference that is  $\frac{1}{2}$  the circumference of each of the first drive pulleys; and,  
a drive motor mounted to at least one of the ends of the beam to drive a corresponding one of the first and second pulleys.

25. The web cutting apparatus of claim 24 wherein each of the first and second pulleys are toothed sprockets located at each end of the

beam and are driven by a single drive shaft, and the first and second movable belts are timing belts

26. The web cutting apparatus of claim 24 wherein each of the first and second pulleys are toothed sprockets located at each end of the beam and are driven by a single drive shaft, and the first and second movable belts are chain belts.

27. The web cutting apparatus of claim 25 wherein the first and second sprockets located at each end of the beam are initially rotatable relative to each other for initial adjustments and are locked in place relative to each other during operation.

28. The web cutting apparatus of claim 21 wherein the supply conduit has a first end connected to said cutting apparatus and has a second end connected to a supply fitting located adjacent an end of the beam, the supply fitting having a spring clamp to compensate for hose shrinkage while maintaining a nominal tension on the hose.

29. The web cutting apparatus of claim 21 wherein the beam has a wall adjacent the web that has apertures through which a negative pressure is drawn to pull the web against the wall of the beam.

30. The web cutting apparatus of claim 21 wherein the supply conduit is looped around the wheel by 180 degrees.



31. The web jet cutting apparatus of claim 10 wherein the supply conduit is looped around the wheel by 180 degrees.



32. The web jet cutting apparatus of claim 1 wherein the supply conduit is looped around the wheel by 180 degrees.

A WEB CUTTING APPARATUS FOR  
USE IN A PAPERMAKING MACHINE

ABSTRACT

5 A water jet cutting apparatus for use in a papermaking machine has  
an elongated support beam that extends across the width of the web. The  
water jet cutting apparatus utilizes a free spinning hose wheel about which  
the water jet hose supplying water to a water jet nozzle is guided and  
stretched. The wheel is mounted for movement with a slower moving  
carriage along the beam adjacent a faster moving carriage carrying the  
10 water jet nozzle. The slower moving carriage moves along the beam at  
speeds which are one half the speeds at which the faster moving carriage  
moves across the beam. During this movement of the second slower  
moving carriage, the wheel reels the hose thereabout to provide a  
travelling intermediate support for the hose. The hose wheel supports the  
15 weight of the hose and maintains it in alignment with the faster moving  
carriage so that less strain and stress is placed on the hose and the ends of  
the hose connected to the water jet nozzle during movement of the water  
jet nozzle across the beam. The water jet cutting apparatus has a preferred  
application as a tip cutting device in a reel turn-up application in a  
20 papermaking machine when two sets of faster and slower moving  
carriages are arranged for movement on opposite sides of the support  
beam to move towards each other in directions transverse to the web.

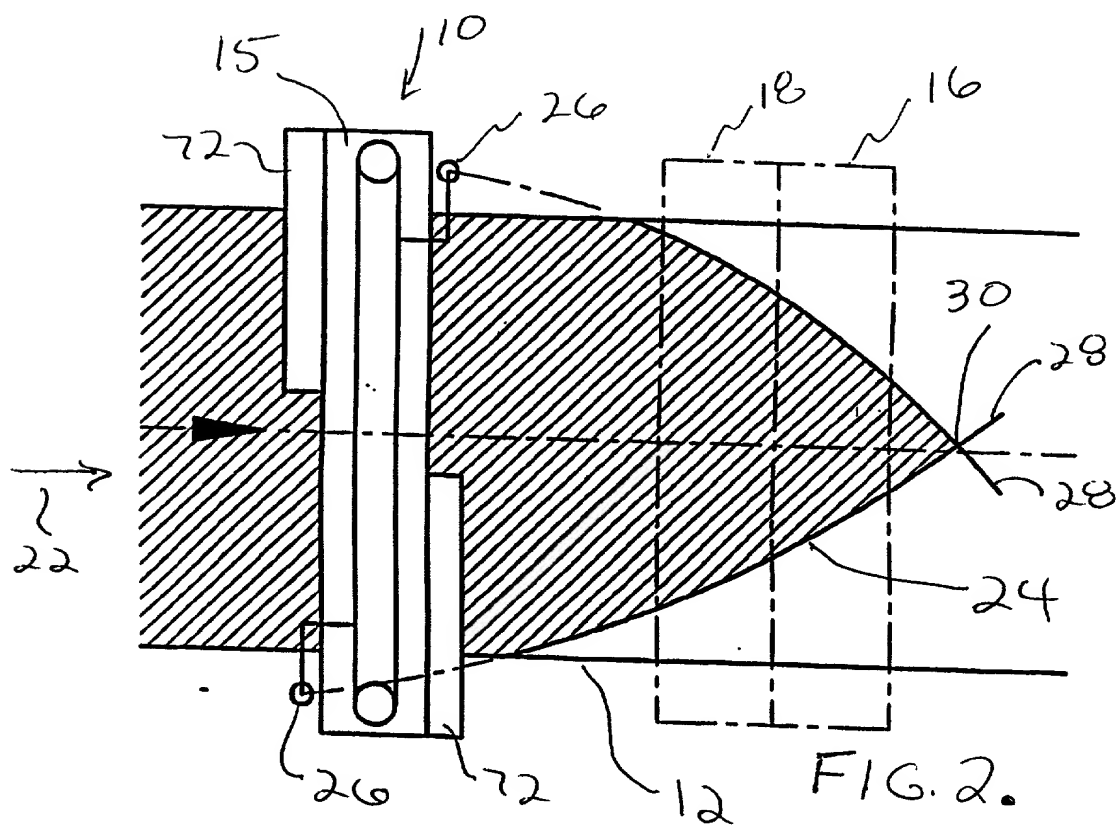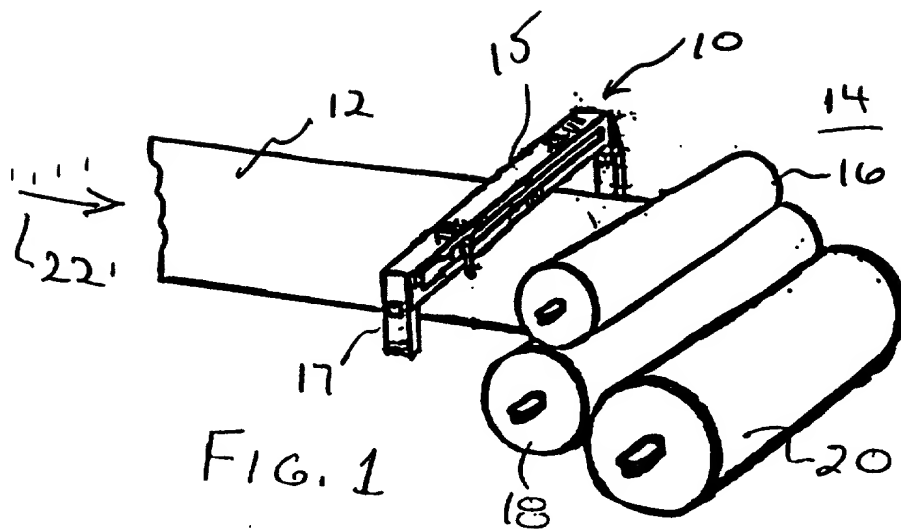

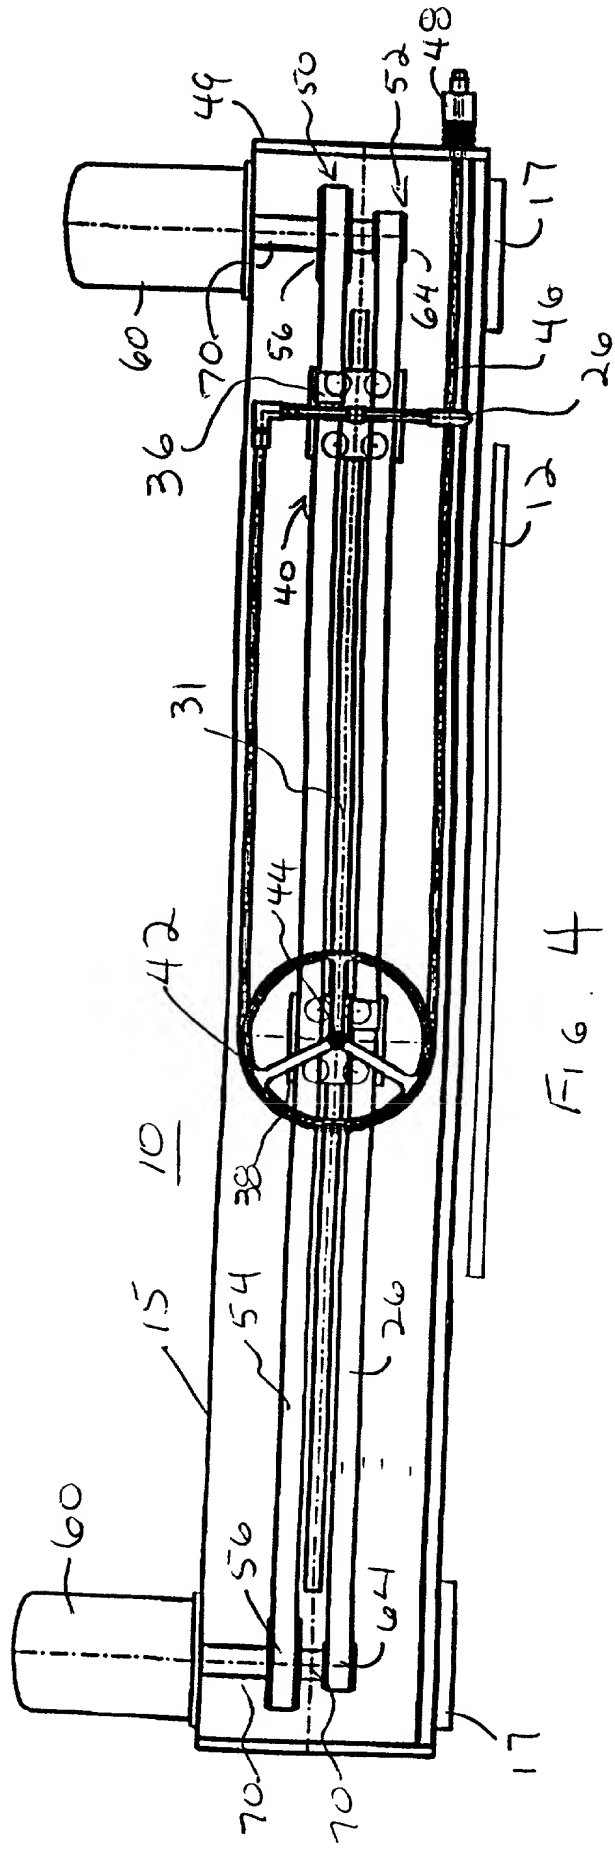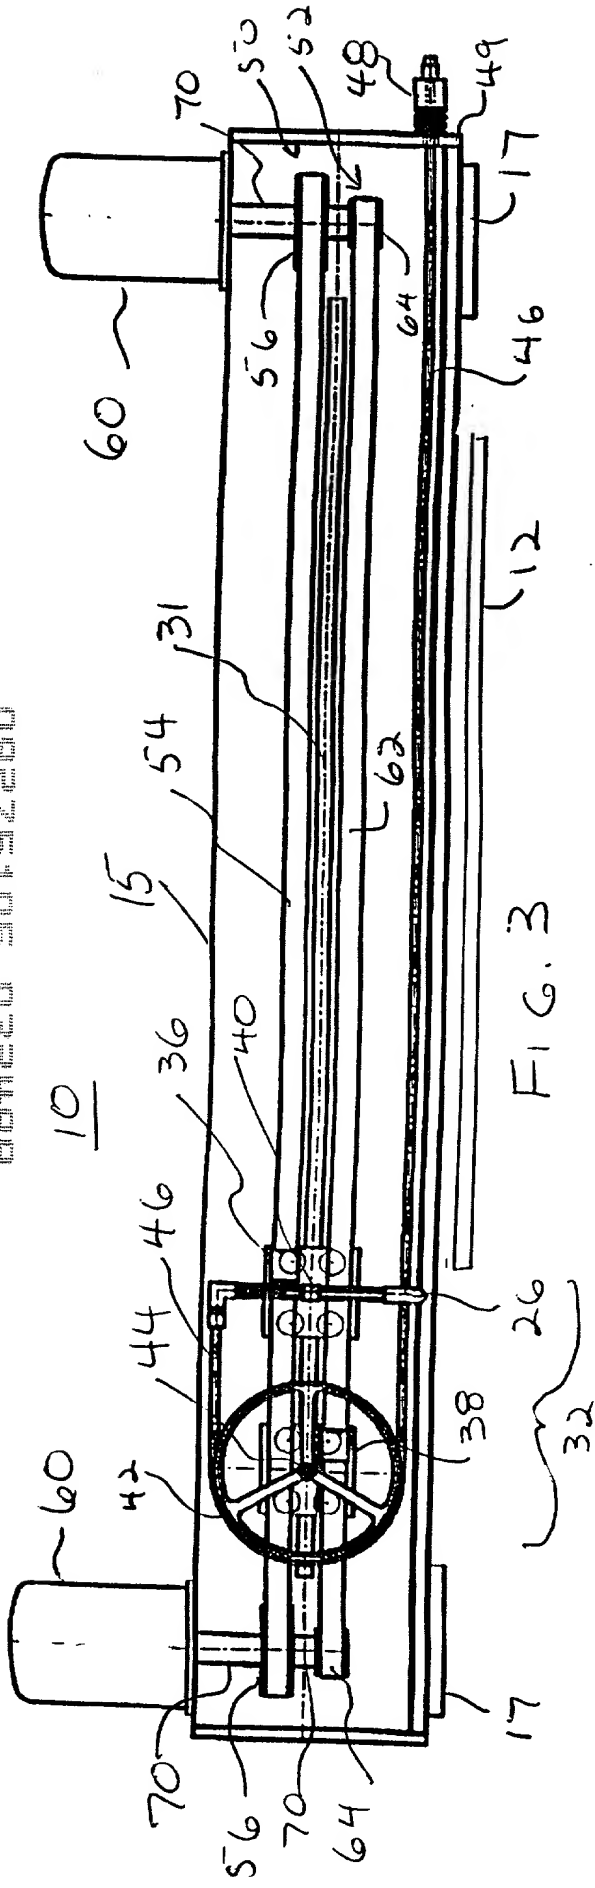




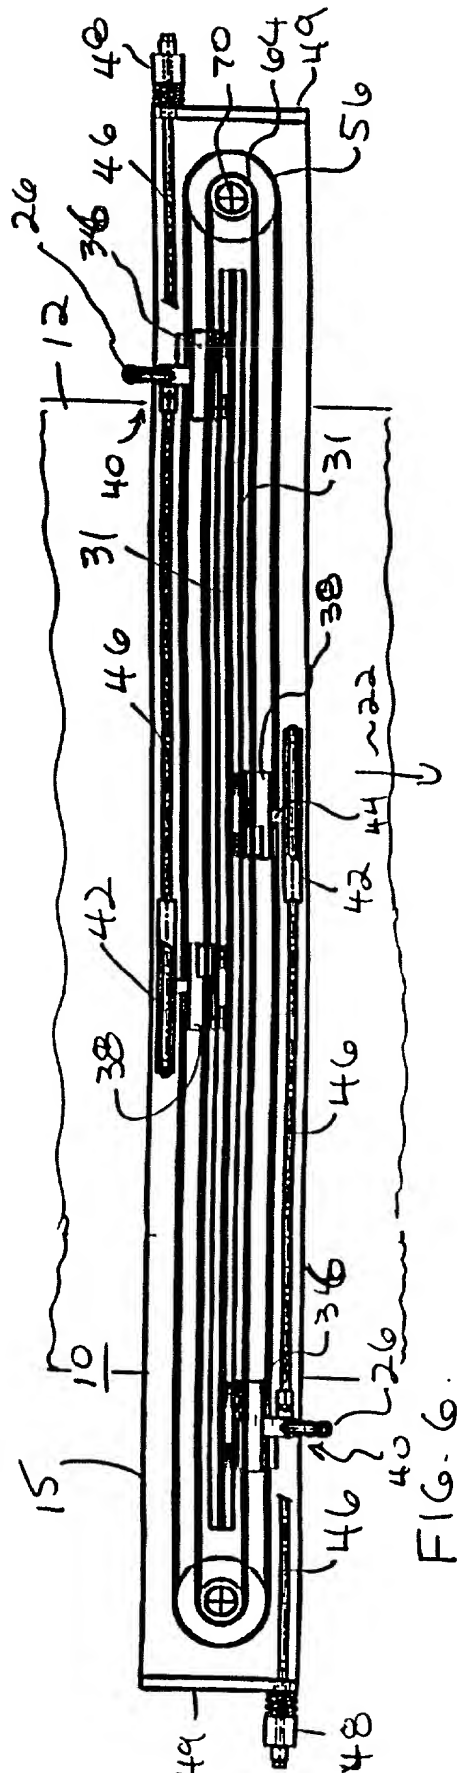


FIG. 6.

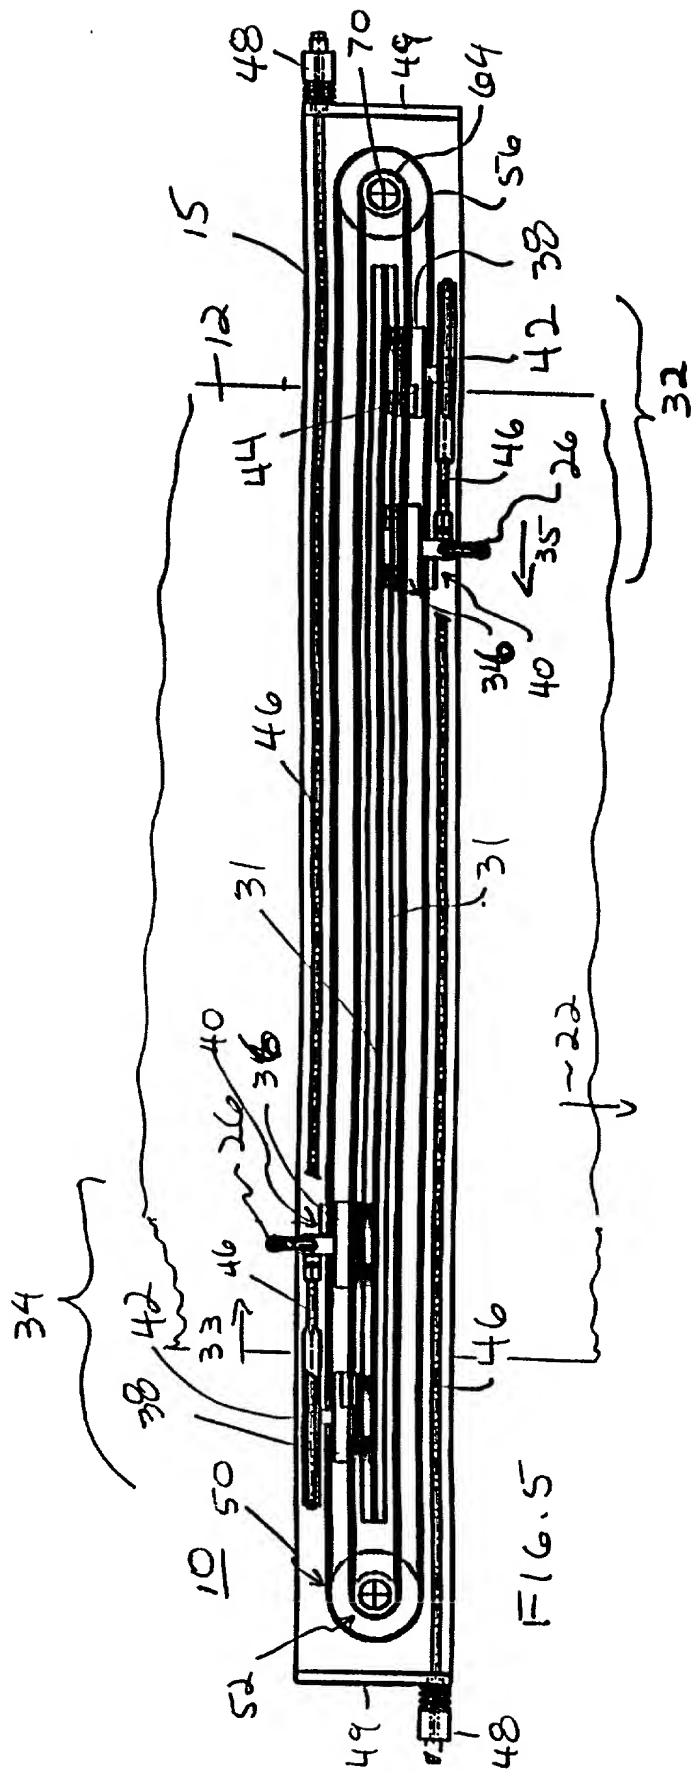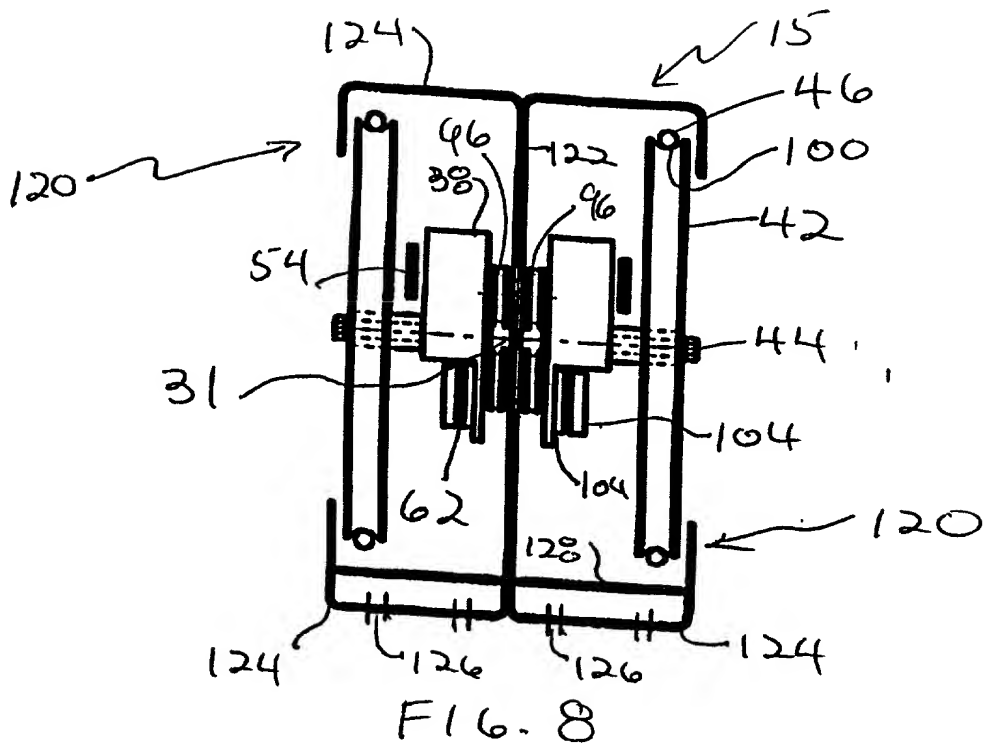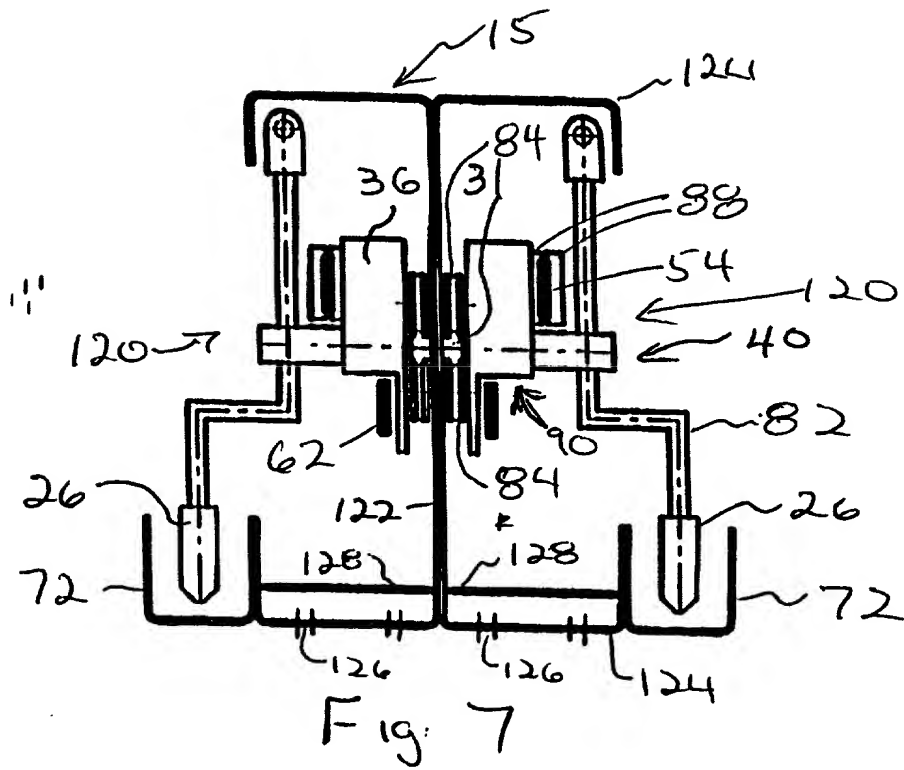

7  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
8

My residence, post office address and citizenship are as stated below next to my name.

# A WEB CUTTING APPARATUS FOR USE IN A PAPERMAKING MACHINE

X is attached hereto.

\_\_\_\_\_ was filed on as Application Serial No \_\_\_\_\_ and  
was amended on \_\_\_\_\_.  
(if applicable)

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal regulations 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application in which priority is claimed:

**Priority Claimed**

<u>2,260,290</u>	<u>CANADA</u>	<u>01 25 1999</u>	<u>X</u>	
(Number)	(Country)	(Month/Day/Year) Filed	Yes	No

I hereby claim the benefit under Title 35, United States Code 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

Page 1 of 2



direct that all correspondence and telephone calls in connection with this application be addressed to the said:

Craig Wilson  
 Craig Wilson and Company  
 2570 Matheson Blvd. East  
 Suite 211  
 Mississauga, Ontario L4W 4Z3  
 Canada

Telephone: (905) 629-6940


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1)

Full name of inventor

ROMAN C. CASPAR

Inventor's Signature

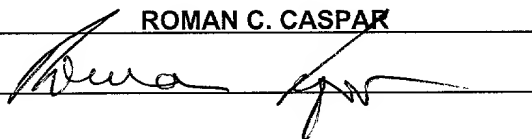

26-02-99

(Date)

Residence

BEACONSFIELD, QUEBEC, CANADA

Citizenship

CANADIAN


Post Office Address 21 MARGARET ANN, BEACONSFIELD, QUEBEC H9W 5N7, CANADA

(2)

Full name of inventor

DIETER H. HILKER

Inventor's Signature



26-02-99

(Date)

Residence

MASCOUCHE HEIGHTS, QUEBEC, CANADA

Citizenship

CANADIAN

Post Office Address 804 CHEM. DES ANGLAIS, MASCOUCHE HEIGHTS, QUEBEC J7L 3R6, CANADA